



TECHNICAL INFORMATION Unit Color: Body Type: Silicon Steel Sheet Operation Temperature: -25°C to +60°C Dimension: 46x34.2x75mm Input Current: 200A Output Current: 5A

FEATURES

- CT for Smart Meter
- Rated input:200A, Rated output: 5A
- Max. detection input: 240A
- Accuracy: ±1% & Linearity ≤0.2%


Turns ratio-1:40, Max.Sampling resistance: $2\Omega \text{Dielectric}$ strength, 50 Hz,1 min - 3.5KV

LED LIGHTING | CT FOR SMART METER

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 11506 - Black View more details

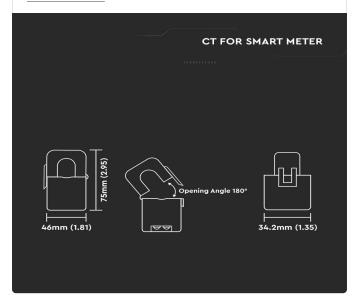

PACKAGING

Gross Weight (Kgs): 0.2
Unit CBM: 2.49
Dimension: 46x34

Dimension: 46x34.2x75mm

MASTER BOX PACKAGING

Box Qty: 1

LISTING DETAILS

Ean Code: 3800157693233