# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

### Supplier's name or trade mark: V-TAC

Supplier's address: V-TAC Europe Ltd., bul. Rozhen 41, Sofia, BG

#### Model identifier: 23334

## Type of light source:


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	+ve and -ve (be- cause strips are DC voltage and have black and red wires)		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers

Product parameters						
Parameter	Value	Parameter	Value			
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F			
Useful luminous flux (duse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	804 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000			
On-mode power (P <sub>on</sub> ), ex- pressed in W	8,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second dec- imal	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			

	1	1				
Outer dimen-	Height	5	Spectral power dis-	See image		
sions without	Width	11	tribution in the	in last page		
separate con- trol gear, light- ing control parts and non- lighting con- trol parts, if any (millime- tre)	Depth	500	range 250 nm to 800 nm, at full-load			
Claim of equiva	lent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
			Chromaticity coordi-	0,432		
			nates (x and y)	0,397		
Parameters for LED and OLED light sources:						
R9 colour rende	ring index value	4	Survival factor	1,00		
the lumen main	tenance factor	0,96				
(2)						

(a)<sub>'-'</sub> : not applicable;

(b)'-' : not applicable;

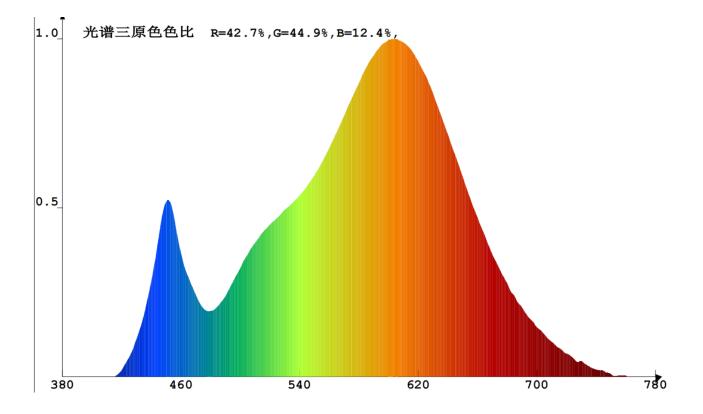

Model placed on the Union market from 13/12/2023



**EPREL registration number:** 1872567

**Supplier:** V-TAC Europe Ltd (Manufacturer)

#### **Customer care service:**

**Name:** V-TAC Europe Ltd.

Email: office@v-tac.eu

Address: bul. Rozhen 41 Sofia Bulgaria https://eprel.ec.europa.eu/qr/18 72567

Website: www.v-tac.eu

Website: www.v-tac.eu

Phone: +359290566